



SP2BN / 2날 롱넥 볼




- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 매끄러운 인선부 처리로 부드럽고 안정된 절삭!

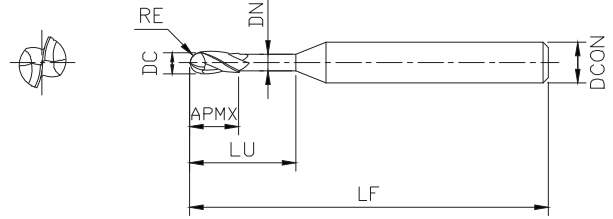


주문번호 EDP No.	반지름 X 유효장 RE X LU	전장 LF	날길이 APMX	자루경 DCON	목부경 DN
SP2BNX0P7X2	R0.35 X 2	45	0.6	4	0.65
SP2BNX0P7X4	R0.35 X 4	45	0.6	4	0.65
SP2BNX0P7X6	R0.35 X 6	45	0.6	4	0.65
SP2BNX0P7X8	R0.35 X 8	45	0.6	4	0.65
SP2BNX0P7X10	R0.35 X 10	45	0.6	4	0.65
SP2BNX0P8X2	R0.4 X 2	45	0.6	4	0.75
SP2BNX0P8X3	R0.4 X 3	45	0.6	4	0.75
SP2BNX0P8X4	R0.4 X 4	45	0.6	4	0.75
SP2BNX0P8X5	R0.4 X 5	45	0.6	4	0.75
SP2BNX0P8X6	R0.4 X 6	45	0.6	4	0.75
SP2BNX0P8X7	R0.4 X 7	45	0.6	4	0.75
SP2BNX0P8X8	R0.4 X 8	45	0.6	4	0.75
SP2BNX0P8X10	R0.4 X 10	45	0.6	4	0.75
SP2BNX0P8X12	R0.4 X 12	45	0.6	4	0.75
SP2BNX0P8X14	R0.4 X 14	45	0.6	4	0.75
SP2BNX0P9X4	R0.45 X 4	45	0.7	4	0.85
SP2BNX0P9X8	R0.45 X 8	45	0.7	4	0.85
SP2BNX1X2	R0.5 X 2	45	0.8	4	0.95
SP2BNX1X2P5	R0.5 X 2.5	45	0.8	4	0.95
SP2BNX1X3	R0.5 X 3	45	0.8	4	0.95
SP2BNX1X4	R0.5 X 4	45	0.8	4	0.95
SP2BNX1X5	R0.5 X 5	45	0.8	4	0.95
SP2BNX1X6	R0.5 X 6	45	0.8	4	0.95
SP2BNX1X7	R0.5 X 7	45	0.8	4	0.95
SP2BNX1X8	R0.5 X 8	45	0.8	4	0.95
SP2BNX1X9	R0.5 X 9	45	0.8	4	0.95
SP2BNX1X10	R0.5 X 10	45	0.8	4	0.95
SP2BNX1X12	R0.5 X 12	45	0.8	4	0.95
SP2BNX1X14	R0.5 X 14	45	0.8	4	0.95
SP2BNX1X16	R0.5 X 16	45	0.8	4	0.95
SP2BNX1X20	R0.5 X 20	45	0.8	4	0.95
SP2BNX1P2X4	R0.6 X 4	45	1	4	1.15
SP2BNX1P2X6	R0.6 X 6	45	1	4	1.15
SP2BNX1P2X8	R0.6 X 8	45	1	4	1.15
SP2BNX1P2X10	R0.6 X 10	45	1	4	1.15
SP2BNX1P2X12	R0.6 X 12	45	1	4	1.15
SP2BNX1P2X14	R0.6 X 14	50	1	4	1.15
SP2BNX1P2X16	R0.6 X 16	50	1	4	1.15
SP2BNX1P2X20	R0.6 X 20	50	1	4	1.15
SP2BNX1P4X6	R0.7 X 6	45	1.2	4	1.35

SP2BN / 2날 롱넥 볼



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 매끄러운 인선부 처리로 부드럽고 안정된 절삭!

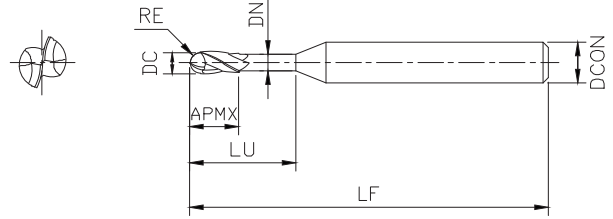

주문번호 EDP No.	반지름 X 유효장 RE X LU	전장 LF	날길이 APMX	자루경 DCON	목부경 DN
SP2BNX1P4X8	R0.7 X 8	45	1.2	4	1.35
SP2BNX1P4X12	R0.7 X 12	50	1.2	4	1.35
SP2BNX1P4X16	R0.7 X 16	50	1.2	4	1.35
SP2BNX1P5X3	R0.75 X 3	45	1.6	4	1.45
SP2BNX1P5X4	R0.75 X 4	45	1.6	4	1.45
SP2BNX1P5X6	R0.75 X 6	45	1.6	4	1.45
SP2BNX1P5X8	R0.75 X 8	45	1.6	4	1.45
SP2BNX1P5X10	R0.75 X 10	45	1.6	4	1.45
SP2BNX1P5X12	R0.75 X 12	45	1.6	4	1.45
SP2BNX1P5X14	R0.75 X 14	50	1.6	4	1.45
SP2BNX1P5X16	R0.75 X 16	50	1.6	4	1.45
SP2BNX1P5X18	R0.75 X 18	55	1.6	4	1.45
SP2BNX1P5X20	R0.75 X 20	55	1.6	4	1.45
SP2BNX1P5X22	R0.75 X 22	60	1.6	4	1.45
SP2BNX1P5X25	R0.75 X 25	65	1.6	4	1.45
SP2BNX1P5X30	R0.75 X 30	70	1.6	4	1.45
SP2BNX2X4	R1 X 4	45	1.6	4	1.95
SP2BNX2X5	R1 X 5	45	1.6	4	1.95
SP2BNX2X6	R1 X 6	45	1.6	4	1.95
SP2BNX2X8	R1 X 8	45	1.6	4	1.95
SP2BNX2X10	R1 X 10	45	1.6	4	1.95
SP2BNX2X12	R1 X 12	45	1.6	4	1.95
SP2BNX2X14	R1 X 14	50	1.6	4	1.95
SP2BNX2X16	R1 X 16	50	1.6	4	1.95
SP2BNX2X18	R1 X 18	55	1.6	4	1.95
SP2BNX2X20	R1 X 20	55	1.6	4	1.95
SP2BNX2X22	R1 X 22	60	1.6	4	1.95
SP2BNX2X25	R1 X 25	65	1.6	4	1.95
SP2BNX2X30	R1 X 30	70	1.6	4	1.95
SP2BNX2P5X10	R1.25 X 10	45	2	4	2.45
SP2BNX2P5X12	R1.25 X 12	45	2	4	2.45
SP2BNX2P5X16	R1.25 X 16	50	2	4	2.45
SP2BNX2P5X20	R1.25 X 20	55	2	4	2.45
SP2BNX3X6	R1.5 X 6	50	2.4	6	2.85
SP2BNX3X8	R1.5 X 8	50	2.4	6	2.85
SP2BNX3X10	R1.5 X 10	50	2.4	6	2.85
SP2BNX3X12	R1.5 X 12	50	2.4	6	2.85
SP2BNX3X14	R1.5 X 14	55	2.4	6	2.85
SP2BNX3X16	R1.5 X 16	55	2.4	6	2.85
SP2BNX3X18	R1.5 X 18	60	2.4	6	2.85


제품 특징

STEEL-PRO


STEEL-PRO+

절삭 조건

SP2BN / 2날 롱넥 볼




- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 매끄러운 인선부 처리로 부드럽고 안정된 절삭!

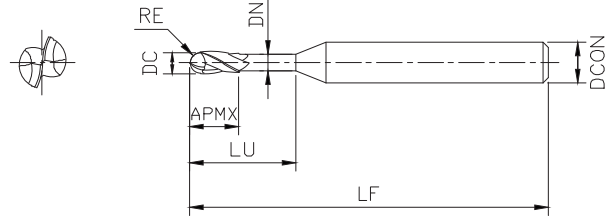


주문번호 EDP No.	반지름 X 유효장 RE X LU	전장 LF	날길이 APMX	자루경 DCON	목부경 DN
SP2BNX3X20	R1.5 X 20	60	2.4	6	2.85
SP2BNX3X26	R1.5 X 26	65	2.4	6	2.85
SP2BNX3X30	R1.5 X 30	70	2.4	6	2.85
SP2BNX3X35	R1.5 X 35	80	2.4	6	2.85
SP2BNX3X40	R1.5 X 40	90	2.4	6	2.85
SP2BNX3X45	R1.5 X 45	90	2.4	6	2.85
SP2BNX3X50	R1.5 X 50	100	2.4	6	2.85
SP2BNX4X8	R2 X 8	60	3.2	6	3.85
SP2BNX4X10	R2 X 10	60	3.2	6	3.85
SP2BNX4X12	R2 X 12	60	3.2	6	3.85
SP2BNX4X14	R2 X 14	60	3.2	6	3.85
SP2BNX4X16	R2 X 16	60	3.2	6	3.85
SP2BNX4X20	R2 X 20	65	3.2	6	3.85
SP2BNX4X25	R2 X 25	70	3.2	6	3.85
SP2BNX4X30	R2 X 30	80	3.2	6	3.85
SP2BNX4X35	R2 X 35	80	3.2	6	3.85
SP2BNX4X40	R2 X 40	90	3.2	6	3.85
SP2BNX4X45	R2 X 45	90	3.2	6	3.85
SP2BNX4X50	R2 X 50	100	3.2	6	3.85
SP2BNX5X16	R2.5 X 16	60	6	6	4.85
SP2BNX5X20	R2.5 X 20	60	6	6	4.85
SP2BNX5X26	R2.5 X 26	70	6	6	4.85
SP2BNX5X30	R2.5 X 30	70	6	6	4.85
SP2BNX5X35	R2.5 X 35	70	6	6	4.85
SP2BNX5X40	R2.5 X 40	80	6	6	4.85
SP2BNX5X45	R2.5 X 45	90	6	6	4.85
SP2BNX5X50	R2.5 X 50	100	6	6	4.85
SP2BNX5X55	R2.5 X 55	100	6	6	4.85
SP2BNX5X60	R2.5 X 60	100	6	6	4.85
SP2BNX6X20	R3 X 20	60	8	6	5.85
SP2BNX6X20L	R3 X 20	90	12	6	5.85
SP2BNX6X30	R3 X 30	60	8	6	5.85
SP2BNX6X30L	R3 X 30	90	12	6	5.85
SP2BNX8X25	R4 X 25	70	10	8	7.7
SP2BNX8X25L	R4 X 25	100	14	8	7.7
SP2BNX8X35	R4 X 35	70	10	8	7.7
SP2BNX8X35L	R4 X 35	100	14	8	7.7
SP2BNX10X30	R5 X 30	75	12	10	9.7
SP2BNX10X30L	R5 X 30	100	18	10	9.7
SP2BNX10X40	R5 X 40	75	12	10	9.7

SP2BN / 2날 롱넥 볼



- Cu · SUS · 45C ~ 50HRC에서 탁월한 성능 발휘!
- 新 RADIA 코팅 적용으로 高품질 · 長수명 실현!
- 매끄러운 인선부 처리로 부드럽고 안정된 절삭!

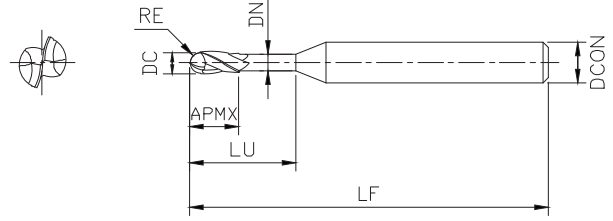

주문번호 EDP No.	반지름 X 유효장 RE X LU	전장 LF	날길이 APMX	자루경 DCON	목부경 DN
SP2BNX10X40L	R5 X 40	100	18	10	9.7
SP2BNX12X32	R6 X 32	80	14	12	11.7
SP2BNX12X32L	R6 X 32	110	22	12	11.7
SP2BNX12X45	R6 X 45	80	14	12	11.7
SP2BNX12X45L	R6 X 45	110	22	12	11.7

제품 특징

STEEL-PRO

STEEL-PRO+

절삭 조건