


SUS-PRO / 4날 플랫



- 홈·측면 절삭에서 복잡한 포켓가공
- BURR가 발생하기 쉬운 가공에도 사용
- 난삭재(SUS, 티탄합금) 가공에서 고성능 발휘!

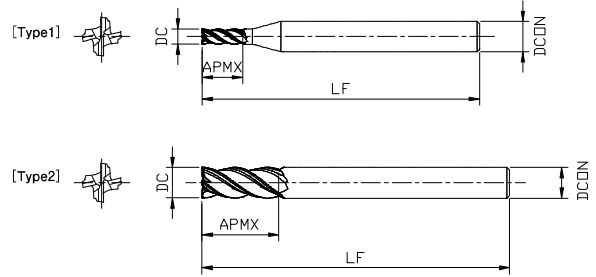

주문번호 EDP No.	외경 DC	전장 LF	날길이 APMX	자루경 DCON
T4P 010 02 4S	1	50	2	4
T4P 010 025 4S	1	50	2.5	4
T4P 010	1	50	2.5	6
T4P 010 03 4S	1	50	3	4
T4P 012	1.2	50	3	6
T4P 015 03 4S	1.5	50	3	4
T4P 015 4S	1.5	50	4	4
T4P 015	1.5	50	4	6
T4P 020 03 4S	2	50	3	4
T4P 020 4S	2	50	6	4
T4P 020	2	50	6	6
T4P 025 04 4S	2.5	50	4	4
T4P 025 4S	2.5	50	7	4
T4P 025	2.5	50	7	6
T4P 025 08 4S	2.5	50	8	4
T4P 030 05	3	55	5	6
T4P 030	3	55	8	6
T4P 030 10	3	60	10	6
T4P 035	3.5	55	10	6
T4P 040 06	4	55	6	6
T4P 040	4	55	10	6
T4P 040 12	4	60	12	6
T4P 045	4.5	55	12	6
T4P 050 08	5	55	8	6
T4P 050	5	55	15	6
T4P 050 20	5	55	20	6
T4P 055	5.5	60	15	6
T4P 060	6	60	15	6
T4P 060 20	6	65	20	6
T4P 060 25	6	70	25	6
T4P 070	7	70	20	8
T4P 080	8	70	20	8
T4P 080 25	8	70	25	8
T4P 080 30	8	80	30	8
T4P 100	10	75	25	10
T4P 100 30	10	80	30	10
T4P 100 35	10	85	35	10
T4P 120 20	12	80	20	12

SUS-PRO / 4날 플랫

주문번호 EDP No.	외경 DC	전장 LF	날길이 APMX	자루경 DCON
T4P 120	12	80	30	12
T4P 120 35	12	80	35	12
T4P 120 40	12	90	40	12
T4P 160 25	16	100	25	16
T4P 160 35	16	100	35	16
T4P 160	16	100	42	16
T4P 160 50	16	110	50	16
T4P 200	20	100	48	20